

Potentiostat/ Galvanostat

For fuel cell stacks, electrolyzers and batteries
EIS Acquisition

Potentiostat **Core**



PTC-10100EW


PTC-0550E | PTC-1050EW | PTC-05100EW




Applications

Potentiostat Core Line is designed for high-power electrochemical applications, including a wide range of fuel cells, electrolyzers, and advanced battery technologies. Integrated EIS provides critical diagnostics for applied R&D, manufacturing, and quality control.

All models are fully driven by Artemis measurement software, ensuring seamless PC-controlled workflows. This enables advanced cycling, custom method sequencing, and full scripting to automate complex experimental procedures.

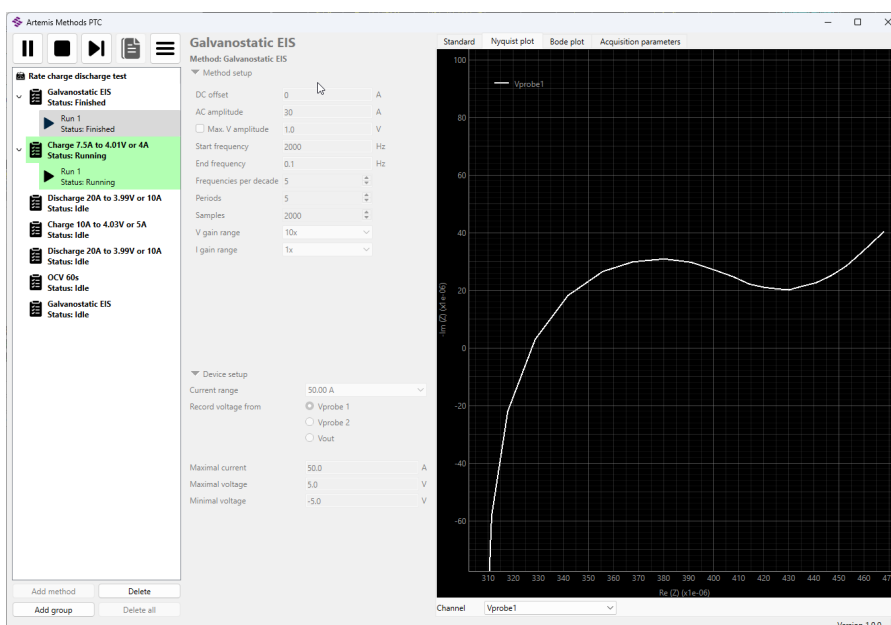

Artemis – Kolibri Measurement Software – EIS

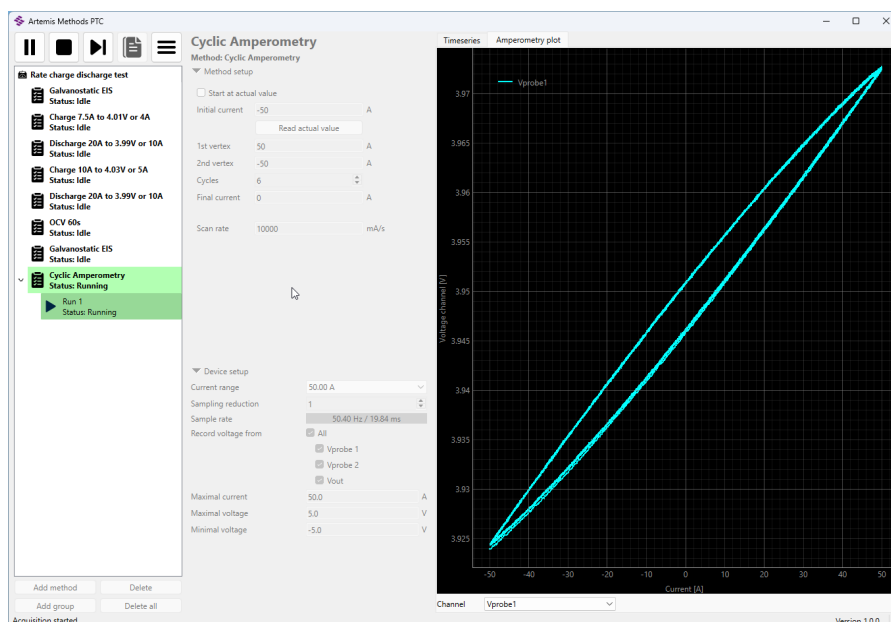

Artemis – Kolibri Measurement Software – Cyclic Amperometry



Technical Parameters

	PTC-0550E	PTC-1050EW	PTC-05100EW	PTC-10100EW
Power supply	110 ... 240 V AC / 50 ... 60 Hz			
Dimensions / Weight	19" rack-mount, 4U; 440 mm (W) × 177 mm (H) × 358 mm (D) / 15 kg			5U; 223 mm (H) / 18,5 kg
Cooling	Air	Water ¹⁾	Water ¹⁾	Water ¹⁾
Protection rating	IP20			
Electrometer Input voltage range	-10 V ... +10 V			
Compliance / Output voltage	-5 V ... +5 V	-10 V ... +10 V	-5 V ... +5 V	-2 V ... +10 V
Compliance / Output current	-50 A ... +50 A	-50 A ... +50 A	-100 A ... +100 A	-100 A ... +100 A
Max. internal power dissipation	350 W ²⁾	1000 W	1000 W	1000 W
Current ranges	500 mA, 5 A, 20 A, 50 A	500 mA, 5 A, 20 A, 50 A	500 mA, 5 A, 20 A, 100 A	500 mA, 5 A, 20 A, 100 A
Sampling	14-bit ADCs, up to 20 Msps for EIS measurements, max. 2000 samples per single frequency			
Measurement resolution	0.001% of selected range for ≤ 1 ksps sampling			
Accuracy	Voltage: ≤ 0.1% of range + 0.1% of reading Current: ≤ 0.1% of range + 0.5% of reading			
Acquisition methods	Constant V, I, Open circuit, Manual control, Linear Sweeps, Cyclic Voltammetry, Cyclic Amperometry, Electrochemical Impedance Spectroscopy (EIS), Chronoamperometry, Chronopotentiometry, Double Step Chronoamperometry, Double Step Chronopotentiometry, Current Interrupt, Square Pulse Potentiometry, Square Pulse Amperometry, Battery Charge and Discharge, Custom experiment sequences, Python scripting			
EIS frequency	1 mHz ... 100 kHz, limited use up to 1 MHz			
EIS amplitude	1 ... 1000 mV, up to 10 A for < 1 kHz	1 ... 1000 mV, up to 25 A for < 1 kHz	1 ... 1000 mV, up to 50 A for < 1 kHz	1 ... 1000 mV, up to 50 A for < 1 kHz
PC connection	USB 2.0			
Software	Artemis Software for MS Windows, TCP Server, NI LabVIEW drivers, Python library and examples			

¹⁾ Water cooling via standard lab/industrial chiller and fittings. We also supply a proven, industry-standard cooling solution to ensure safe and stable operation.

²⁾ 350 W continuous (air cooling, room temperature 25°C). Limitation in sink mode: 50 A for ≤ 2 V, 35 A for 2 ... 5 V, 500 W peak (for 10 s)




Rear View



PTC-0550E
PTC-1020E



PTC-1050EW
PTC-05100EW

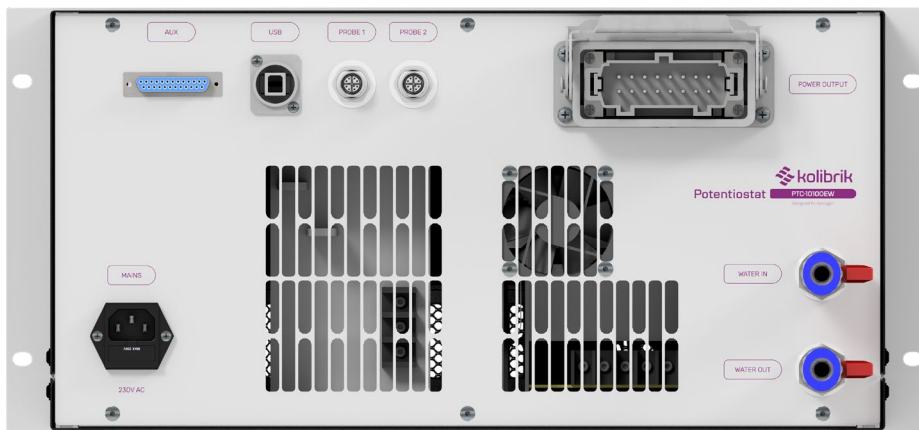

PTC-10100EW

Disclaimer

All rights reserved. All data contained within this manual is for information purposes only and is not guaranteed for legal purposes. The Information has been checked carefully and is believed to be accurate; however, no responsibility is assumed for any inaccuracies. Kolibrick.net, a.s. reserves the right to change, modify, or improve this document or the product described herein, as seen fit without further notice.

Proprietary Note

This document contains proprietary information and is the property of Kolibrick.net, a.s. or under license from third parties. No part of this document may be reproduced, copied, or transmitted in any form or by any means, disclosed to others, or stored in any retrieval system or media without the prior written consent of Kolibrick.net, a.s.