

TEVOMET

Multi-channel temperature
and voltage monitor/meter

TEVOMET TV16





Product Description

TEVOMET is a multi-channel meter suitable for laboratory and industrial use. It features 16 independent channels with high precision

A/D converters with low noise, automatic offset cancellation and AC filtering.

Features

Channel count	16 independent channels for temperature sensors and voltage measuring Each channel is galvanically isolated
Channel voltage range	Multiple order of magnitude input voltage range
Basic voltage ranges	$\pm 1.5\text{ V}$ and $\pm 150\text{ V}$
Most common temperature sensors	Thermocouples, built in precise cold junction compensation RTD sensors (Pt100, Pt1000) NTC thermistors up to 10 k Ω
A/D converters resolution	16-bit precise A/D converters with low noise Automatic offset cancellation and AC filtering
Board dimension	230 x 170 x 55 mm
Cell connection	26-pin IDC connector (automotive-grade connectors on request)
Communication bus	USB RS-485 (XC2 protocol or MODBUS) Compatible with other Kolibrík modules
Inputs / outputs	Opto-isolated I/O with serial communication capability
Accessories	Power supply module USB to RS-485 interface Raspberry PI connection 3D-printed enclosures DIN-rail and wall-mount holders Custom cables Piggyback submodules for current ranges 4 - 20 mA Piggyback for voltage range 5 V Piggyback for voltage range 10 V



Technical Parameters

Power supply	7 ... 33 V DC / 2.2 W max	
Dimensions	230 x 170 x 55 mm (without connector plugs)	
Mounting	4x mounting holes 2.7 mm, hex spacers with M2.5 thread	
Channel count	16 channels Multiple modules can be daisy-chained to measure hundreds of channels	
Channel voltage range	-5 ... +5 V *)	
Input impedance	1 MΩ	
Isolation	51 kV between channels and power supply + communication bus Additional isolation can be provided by isolating bus segments	
Sampling	Precise 24-bit ADCs All-channel sample rate up to 500 sps	
Accuracy	0.02% of range + 0.05% of reading	
Communication	USB RS-485 (XC2 protocol or MODBUS)	
Measurement resolution	0.001% of selected range for ≤ 1 ksps sampling	
Accuracy	Voltage	≤ 0.1% of range + 0.1% of reading
	Current	≤ 0.1% of range + 0.5% of reading
I/O	Optional digital optocoupler input and output, may work as additional serial line	
Ambient operating temperature	-40 °C to +85 °C	


*) Channels are organized by groups of 8 channels. Channels in one group can measure up to ±20 V if the sum of group channels does not exceed 20 V. So, one channel can measure up to ±20 V, if other channels in group are short-circuited. Note that adjacent channels and groups are chained together and are not independent.



Applications

Fuel-cell stack monitoring	Experimental instrumentation
Electrolyzer monitoring	Bakeout controllers
Battery monitoring	Test stand automation

Channel Connection and Configuration

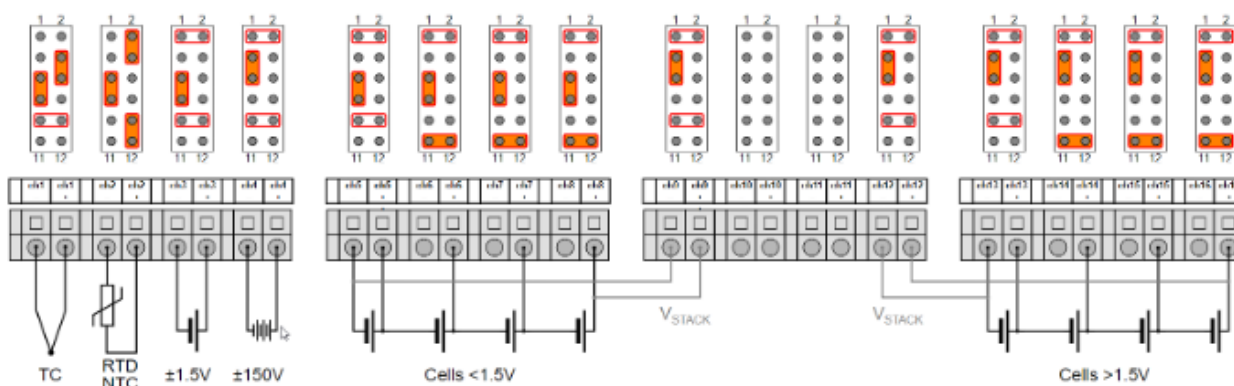

Examples of connections and jumper setup



Block scheme of modules in 120-channel



Ordering Information

TEVOMET TV16	16 independent channels, individually configurable by jumpers, connection to internal clamps, RS-485, USB
--------------	-----------------------------------------------------------------------------------------------------------

Piggyback submodules for custom voltage ranges. Other ranges on request.

TVM-PB-5	Piggyback for voltage range 5 V
TVM-PB-10	Piggyback for voltage range 10 V
TVM-PB-CL	Piggyback submodules for current ranges 4 – 20 mA



Example of voltage range piggybacks

Disclaimer

All rights reserved. All data contained within this manual is for information purposes only and is not guaranteed for legal purposes. The Information has been checked carefully and is believed to be accurate; however, no responsibility is assumed for any inaccuracies. Kolibrík.net, s.r.o. reserves the right to change, modify, or improve this document or the product described herein, as seen fit without further notice.

Proprietary Note

This document contains proprietary information and is the property of Kolibrík.net, s.r.o. or under license from third parties. No part of this document may be reproduced, copied, or transmitted in any form or by any means, disclosed to others, or stored in any retrieval system or media without the prior written consent of Kolibrík.net, s.r.o.